

Fixing on metal deck

Description:

The **SECURILISSE® evo GCE-BA** is a collective system against falls from heights, designed for roofs that are inaccessible to the public equipped with a steel deck cover. The supports are fixed parallel or perpendicular to the corrugations in the steel deck (210 mm to 330 mm) by means of self-tapping screws; waterproofing is ensured by a specific sealing strip.

Details:

Material: Aluminium

Finish : Raw, anodised or powder-coated


Available version : Straight or inclined

Setup : Delivered with manuals and drawings available online at: <http://extranet.somain.fr>



GCE-BAD (straight)


The **SECURILISSE® evo GCE-BAD** is used for an installation on metal deck roofs with min. 100 mm parapet.

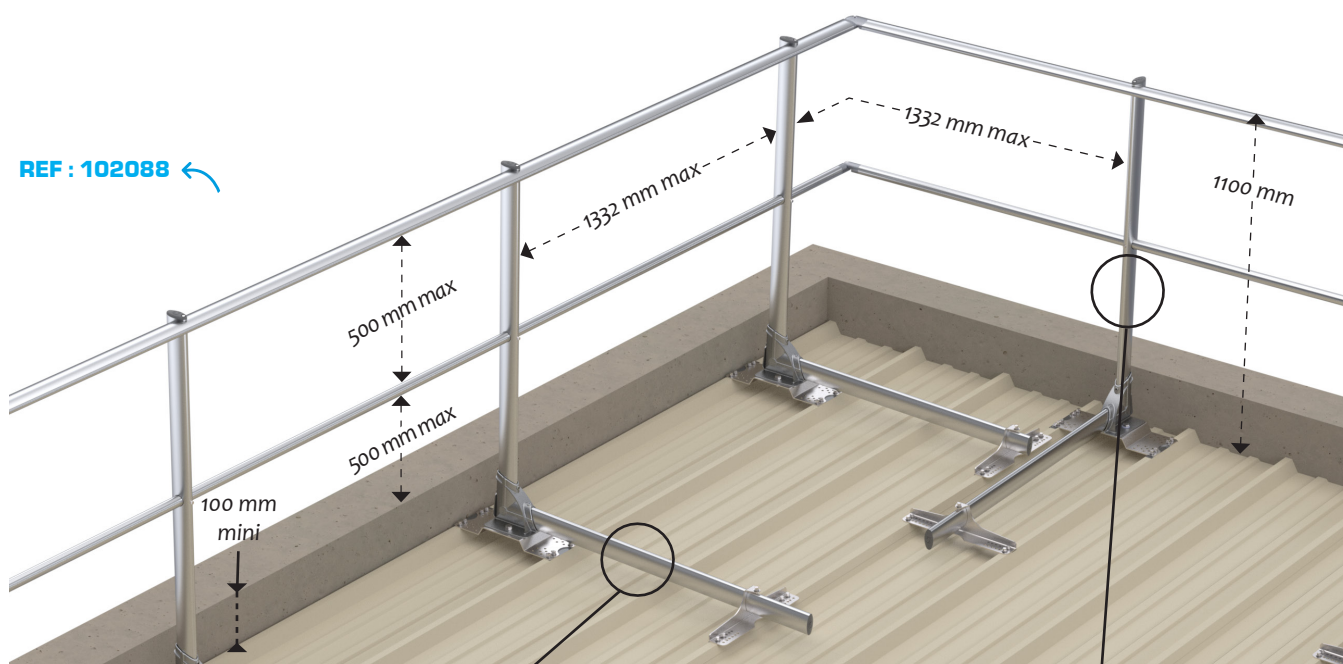


REF : 102088 ←

REF : 100543
Load strut

REF : 101906
Straight upright

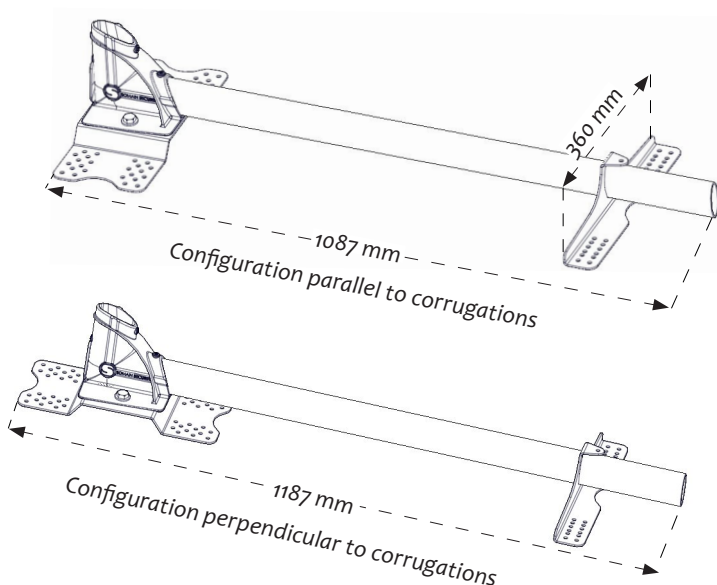

Plinth accessory:


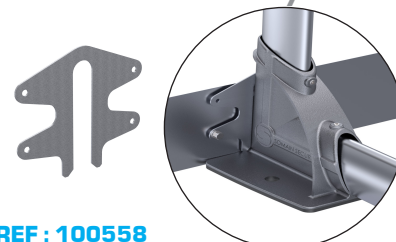


REF : 100558
Plinth fixation for GCE-BA.
With a parapet of less than 100 mm.

Fixing on metal deck


GCE-BAI (inclined)

The 10-degree inclined version is chosen for aesthetic reasons as it is less visible from the ground. It also makes it possible to adjust the slope of the roof.

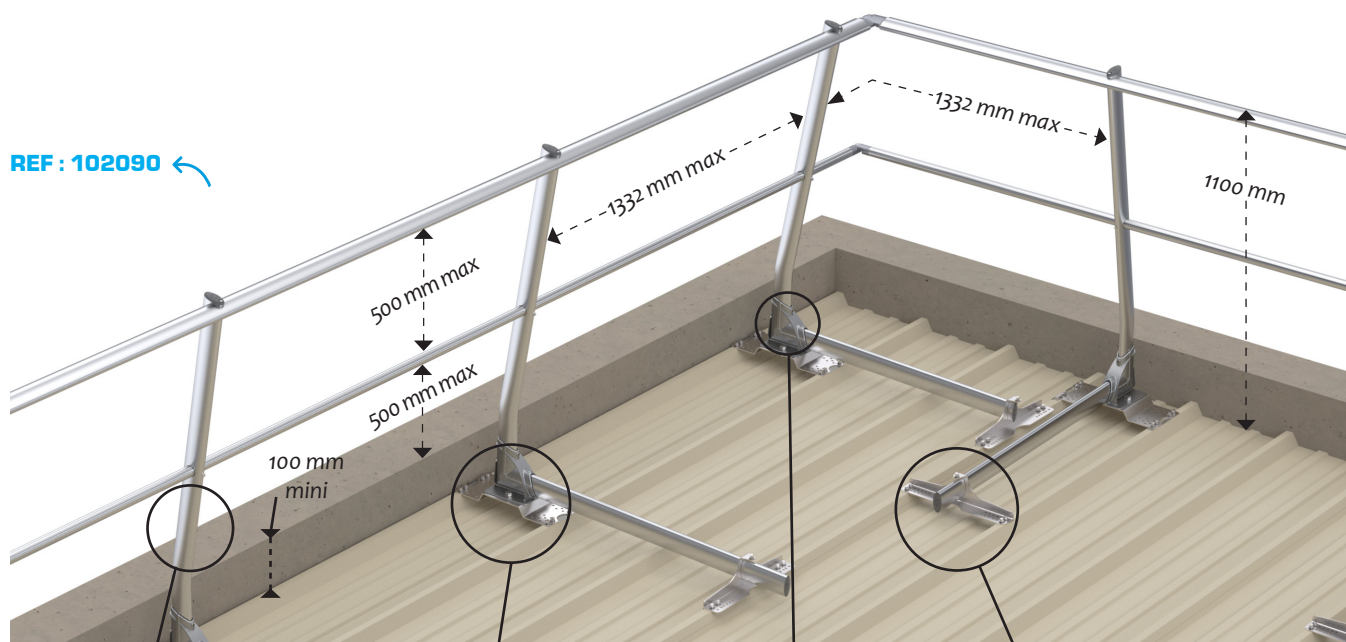

REF : 102231

10-degree inclined upright



REF : 102215

Stainless steel support for corrugations in steel deck bases from 210 to 330mm.

REF : 102219

Zinc-plated support for corrugations in steel decks from 210 to 330 mm.



REF : 100142

Guardrail base without footing. Pre-mounted clamping screws.



REF : 100271

Stainless steel support strut for corrugations in steel decks from 210 to 330 mm.

REF : 101551

Zinc-plated strut support for corrugations in steel decks from 210 to 330 mm.